



23 MAR 2003



10/528907  
PCT7GB 2003/004183



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

DEC 06 NOV 2003  
WIPO PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**BEST AVAILABLE COPY**

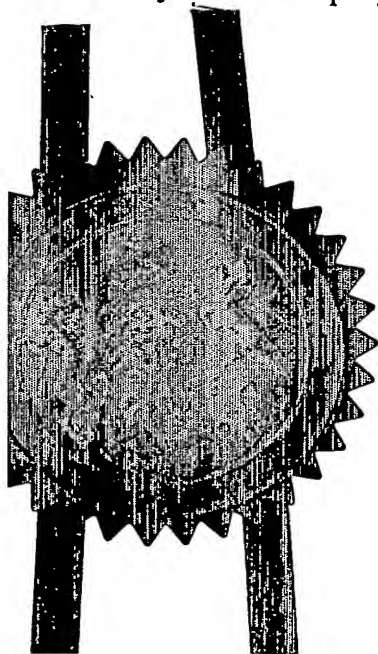

Signed

*R. Mahoney*

Dated 22 October 2003

# Patents Form 1/77

Patents Act 1977  
(Rule 16)



26SEP02 E751034-1 000001  
P01/7700 0.00-022288.3

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference JGP/8488 GB

2. Patent application number 0222288.3  
(The Patent Office will fill in this part)

25 SEP 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames) Airbus UK Limited  
New Filton House  
Filton, Bristol  
BS99 7AR  
United Kingdom  
08352890001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation United Kingdom

08352890001

4. Title of the invention Method and apparatus for joining aircraft components

5. Name of your agent (if you have one) Abel & Imray  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) 20 Red Lion Street  
London  
WC1R 4PQ  
United Kingdom

Patents ADP number (if you know it) 174001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

YES

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 16

Claim(s) 4

Abstract 1 *DML*

Drawing(s) 7+7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1 ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Abel & Imray*

Date

Abel & Imray

25/09/02

12. Name and daytime telephone number of person to contact in the United Kingdom

J G Pearson - (01225) 469914

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Method and apparatus for joining aircraft components

The present invention relates to a method of joining two aircraft components and in particular to a method of enabling two aircraft components to be joined together, wherein the surfaces of the aircraft components to be joined together are so shaped that a gap is defined therebetween and the method includes producing a shim so that the gap may be substantially filled.

When manufacturing aircraft structures, such as for example wings, it is necessary to join one aircraft component to another. It is often the case that aircraft components are manufactured in such a way that when joining two components a shim is needed to fill a gap between the components. The use of a shim when joining components together is common, for example, when joining composite material aircraft structures such as spars and wing skins, owing to difficulties in manufacturing large composite parts accurately to a pre-defined shape. Generally, after a composite component has been moulded to a particular shape, the component changes shape due to effects such as the shrinkage of the resin matrix and other material effects in view of the temperatures of different regions of the material in the mould and in view of the different fibre lay-up directions employed. Such a change in shape is generally referred to as "spring back". Predicting accurately how much a component will spring back after moulding is difficult, if not impossible. It is therefore difficult for component manufacturers to assemble composite components to the tight tolerances required for efficient aircraft production and operation. It may therefore be accepted that such components will spring back, and that the components to be joined together will not, without employing further means, fit together exactly (or close enough to be within acceptable tolerances). Thus, such components may be manufactured such that

there will be a gap, albeit small, between adjacent components that is filled during assembly by means of a shim.

Shims have, to date, been produced by various techniques including machining a solid shim from a separate piece of metal material (such as a piece of aluminium). Solid shims are machined and fettled to fit in the gap and then sealant is used to fix the shim in the gap. Such machining/fettling is time consuming and requires a skilled operator.

Shims have also been produced with the use of sealant without employing any metal pieces. Forming a shim with sealant may be effected by coating either or both surfaces to be joined with sealant, then bringing the surfaces together so that the sealant is squeezed between the components and out from between the components, thereby filling the gap with sealant. Excess sealant squeezed out of the gap is then wiped away. Joining one component to the other using sealant in this way can lead to voids being present between the two components, where insufficient sealant has been provided. Also, filling gaps with sealant in such a way can be inefficient and can even reduce the effectiveness of the join between the two components.

It is an object of the present invention to provide a method and an apparatus which enables two aircraft components to be joined together which avoids or mitigates one or more disadvantages associated with the above described prior art.

According to the present invention there is provided a method of enabling two aircraft components to be joined together, the method including the steps of providing a first aircraft component having a surface to be joined to a corresponding surface of a second aircraft component, the first and second components being so shaped that if joined there would be a gap defined between said surfaces of the first and second components, providing a resin infusion system comprising a source of resin,

effecting flow of the resin from the source of resin into the gap by means of suction, thereby substantially filling the gap with resin, and curing the resin.

Thus, during performance of the method of the present invention resin is caused to flow into and to fill substantially the entire gap, thereby reducing the chance of there being a void in the shim that might affect the structural integrity of the join, once the second aircraft component is joined to the first aircraft component. The method may also be of particular advantage in that when the components are assembled no shimming need take place on the production line.

The method is of particular advantage when the gap has at least one region having a thickness of greater than 0.2mm. The gap may have a thickness, over at least 95% of the area of the gap, of less than 3mm. Preferably, the gap has a maximum thickness of less than 3mm. The gap may have a varying thickness, such that the thickness might vary within a range of between 0mm and 3mm. For example, the gap may have both regions having a thickness of less than 0.7mm and regions having a thickness of greater than 0.7mm. The gap may be so shaped that it has at least one region having a thickness of less than 0.5mm and at least one region having a thickness of greater than 1.0mm.

The flow of the resin out of the gap is advantageously restricted by means of a barrier. The barrier may for example be placed such that a surface of the barrier is positioned along at least a part of the boundary of the gap. Whilst, the barrier could be in the form of a part of the second aircraft component, it is preferred that the barrier be distinct from the second aircraft component. At least a part of the barrier is advantageously formed by a surface of the resin infusion system. The surface of the resin infusion system that forms the barrier (or part thereof) may for example be in the form of a part of a

moulding tool that forms a part of the resin infusion system. The surface of the barrier that faces the surface of the first component is preferably shaped to correspond to said surface of the second aircraft component.

5       The barrier is, during the filling of the gap with resin, preferably removably, for example temporarily, fixed in position relative to the first aircraft component. In the case where the barrier is a surface defined by the resin infusion system, the first aircraft component may be removably, for example  
10 temporarily, fixed in position relative to the resin infusion system. The resin infusion system may include a locating element that engages with a corresponding element on the first aircraft component. The barrier may include a locating element that engages with a corresponding element on the first aircraft  
15 component. Such a locating element may assist in fixing the first aircraft component in the desired position relative to the resin infusion system/barrier. The method may include a step of machining, or otherwise forming, a hole in the first aircraft component, the hole being configured to receive the locating  
20 element. There may be more than one locating element. Preferably there are at least two locating elements.

      The barrier is preferably fixed to the first aircraft component by means of a pressure difference. A vacuum pump may for example be used to cause the pressure difference. A vacuum  
25 pump may be used to provide the suction that draws the resin into the gap. Advantageously, a single vacuum pump is used both to cause the pressure difference that fixes the barrier to the first aircraft component and to provide the suction that draws the resin into the gap. The single vacuum pump may however be viewed  
30 as being the only common part of two distinct suction systems.

      A filter is preferably provided to hinder, or preferably substantially restrict, flow of the resin out of the gap. The

filter is for example placed at the boundary of the gap and the source of suction and allows air to be drawn from the gap, whereas the flow of resin through the filter is hindered. Preferably the filter is so configured that during performance of the method less than 1% of the resin introduced into the gap escapes out of the gap via the filter.

The resin infusion system preferably includes a plurality of resin ports, through which resin passes and then into the gap. The plurality of resin ports may for example be in the form of outlets, holes, passages, channels or the like. The plurality of resin ports may be provided along the length of a conduit. For example, in the embodiment of the invention described below with reference to the drawings, a coiled spring is provided that in use is sealed along its length around a section of its circumference so that it acts as a pipe with a series of ports, in the form of apertures, along its length.

Preferably, the resin infusion system includes a plurality of suction ports to which the suction is applied. The plurality of suction ports may for example be in the form of holes, passages, channels, suction inlets or the like. The suction ports may be formed in the first aircraft component. The suction ports may alternatively or additionally be formed in a barrier or another component.

The first aircraft component may include at least one aperture arranged so that the suction is provided via said at least one aperture. For example, in the embodiment of the invention described below with reference to the drawings, the first aircraft component is in the form of a wing spar and ports are provided as holes in the spar that pass from one surface of the spar to an opposite surface of the spar. Such holes may for example perform at least one other purpose. For example, in the embodiment described below the holes are in the form of pilot



holes that are present in the spar for the purpose of fixing ribs to the spar. Advantageously, substantially all apertures or holes in the first component that are used in the method perform another purpose or function. The method may therefore be  
5 performed without needing to machine any holes other than those that would in any case have been machined.

The curing of the resin is conveniently effected by a cold curing technique. Whilst possible, the resin is preferably not heated prior to being drawn into the gap. The resin may be  
10 allowed to cure at a temperature below 40 degrees Centigrade, preferably at a temperature between 0 and 30 degrees Centigrade. Preferably the resin is cured at, or close to, room temperature.

The method is preferably so performed that the difference in pressure between the source of suction and the source of resin is  
15 less than 2 bar. Preferably the pressure difference is less than 1.5 bar. More preferably the pressure difference is 1 bar or less. The pressure difference is preferably at least 0.1 bar. The resin may be supplied at a pressure substantially equal to atmospheric pressure. It may be advantageous, for example  
20 depending on the choice of resin, for the resin to be supplied at a pressure above atmospheric pressure. The afore-mentioned pressure differences are preferably maintained for at least the majority of the duration of the step of filling the gap with resin and more preferably for at least 90% of the duration of  
25 that step.

The method may include a step of reducing the suction applied, but maintaining a pressure gradient. Such a step is preferably performed after the resin has substantially filled the gap. Thus the first component, if deformed by means of the  
30 pressure difference applied during the filling of the gap with resin, may relax and conform substantially to its original shape.

The method may include a step of placing solid material in

the gap before effecting flow of the resin into the gap. For example, if the gap has regions of a certain thickness of greater than, say, 0.7mm, it may be beneficial for the resin in such regions to be strengthened by means of solid material. The solid material preferably comprises fibres. The solid material may for example be in the form of a dry woven cloth, for example a carbon fibre cloth or a glass fibre cloth. The method preferably includes a step of assessing which regions of the gap have a thickness greater than a predetermined threshold thickness. Solid material may thereafter be placed in the regions so identified. The predetermined threshold thickness is preferably within the range of 0.6mm to 1mm.

The resin is preferably a relatively low viscosity resin. Preferably, the resin has a viscosity of less than 1000 centipoises and more preferably of less than 800 centipoises. The resin may for example have a viscosity in the range of 400 to 750 centipoises.

The method has particular application when at least one of the aircraft components to be joined are formed of a composite material. Thus the first and/or the second aircraft components may be formed of a composite material.

The method may further include a step of joining the second aircraft component to the first aircraft component. In the embodiment of the invention described below with reference to the drawings, the first aircraft component, in the form of a wing spar, is mounted on a moulding tool during the step of filling the gap with resin. In such a case, the first aircraft component would of course be removed from the moulding tool together with the cured resin before joining the first and second aircraft components. Sealant may be used when bonding the first component and shim to the second component..

Preferably, one of the first and second components is a

spar, or part thereof. Preferably, one of the first and second components is a wing skin, or part thereof. For example, the first aircraft component may be a wing spar and the second aircraft may be a portion of wing skin.

5       The aircraft components to be joined and the way in which the method is performed may be such that the resin once cured can be considered as being in the form of a shim. In such cases, the method may be viewed as being a method of forming a shim.

10       The invention also provides a method of preparing an aircraft component before joining the component to another component, the method including the steps of providing a first aircraft component and a shim tool having a surface shaped to correspond to the surface of a second aircraft component to which the first component is to be joined, arranging the surface of the  
15       shim tool and the first aircraft component against each other, thereby forming a gap between the tool and the component, and causing the shim tool to fill the gap with a shim produced by a vacuum resin infusion technique. The shim is preferably formed of a resin. Features described above in relation to the  
20       invention may of course be incorporated into this aspect of the invention.

25       The invention yet further provides a shim forming apparatus including a moulding tool having a surface shaped to receive a first aircraft component such that a gap is present between the  
30       surface of the moulding tool and the first aircraft component, the surface of the moulding tool being shaped to correspond to the surface of a second aircraft component, the apparatus further including a resin infusion system including a suction pump and a source of resin, the apparatus being so arranged that in use the gap between the surface of the moulding tool and the first aircraft component may be filled with resin to form a shim.

      The moulding tool may have a portion that in use is able to

sealingly engage with a portion of the first aircraft component, to define a sealed region, which is connectable to a suction pump so that in use suction may be applied to the region, thereby holding the first aircraft component in a fixed position relative to the moulding tool. The apparatus may further include a vacuum bag that is attachable to the moulding tool and which, in use, enables suction to be applied to the moulding tool to draw resin from the resin source into the gap.

The invention also provides a moulding tool suitable for use in a shim forming apparatus, the moulding tool having a surface shaped to receive a first aircraft component such that a gap is present between the surface of the moulding tool and the first aircraft component, the surface of the moulding tool being shaped to correspond to the surface of a second aircraft component, the moulding tool being so configured that it may be arranged so that a gap formed between the surface of the moulding tool and such a first aircraft component may be filled with resin to form a shim.

The invention further provides an aircraft component and shim as produced by the method or apparatus of the invention. There is also provided an aircraft structure including a first aircraft component connected to a second aircraft component, there being a shim interposed between the first and second components the shim being produced by the method or apparatus of the invention. There is yet further provided an aircraft including such an aircraft structure.

Of course, it will be appreciated that features described in relation to one aspect of the present invention may be incorporated into other different aspects of the invention. For example, the method of the invention may be performed with the shim forming apparatus or moulding tool of the invention. Also, the shim forming apparatus or moulding tool of the invention may be arranged or configured to be suitable for use in the method of

the invention.

By way of example an embodiment of the invention will now be described with reference to the accompanying drawings, schematic of which:

5        Figure 1 is a plan view of an aircraft,

Figure 2a is a cross sectional view of a wing of the aircraft shown in Figure 1,

Figure 2b shows a magnified view of a part of Figure 2a,

10       Figure 3 is a partial cross sectional view showing a spar, a tool according to the embodiment and a shim formed therebetween,

Figure 4 shows a partial perspective view of the tool shown in Figure 3 without a spar,

Figure 5 shows a perspective view of the tool shown in Figure 3 with a spar on the tool,

15       Figure 6 shows a cross section of the tool and spar, and

Figure 7 shows a cross section of the tool and spar during operation of the tool.

20       Figure 2a shows a cross section taken along the line A-A of the wing 1 of the aircraft 2 shown in Figure 1. The wing 1 comprises a front wing spar 3a and a rear wing spar 3b that run along the leading and trailing edges of the wing 1. The spars 3 are generally C-shaped in cross section. Ribs 4 are attached to and between the spars 3a, 3b. Attached to the spars 3a, 3b and 25 the ribs 4 are the upper wing skin 5a and lower wing skin 5b.

The spars 3a, 3b and wing skins 5a, 5b are each formed from composite carbon fibre and matrix materials.

30       Figure 2b shows a magnified view of a portion of Figure 2a in the region of the interface between the front wing spar 3a and the lower wing skin 5b. Owing to the manufacture and assembly process and in particular due to the change in shape of the spar after demoulding (known as "springback"), a gap is present

between the spar 3a and the wing skin 5b.. This gap is filled by a shim 6. The shim 6 is formed in the gap between the spar 3 and the tool 9 by means of a resin vacuum infusion process.

Figure 3 shows a cross section of a part of a tool 9 for making such a shim 6.

With reference to Figure 3, the C-shaped cross section of the spar is defined by two flanges 8, between which there extends the spar web 7, the flanges 8 each extending from the web 7 in a direction that is approximately transverse to the web 7.

In the present embodiment the rear spar 3b is 11.5 metres long and at the root end has a web depth of 250mm, a flange height of 150mm and a laminate thickness of 15mm. The corresponding dimensions at the tip end of the spar, are a depth of 150mm, a flange height of 45mm and a laminate thickness of 6mm.

The shim 6 extends along the majority of the length of the spar and has a width that varies between 0 and about 1.5mm, a height that varies between about 40mm and about 150mm and a length of about 11.5m.

The outer surface of the tool 9 that opposes the surface of the flange 8 of the spar 3 is shaped to correspond to the surface of the wing skin 5 to which the spar 3 is to be attached.

Figure 4 shows the main parts of the tool 9 in perspective. The tool 9, made from polyurethane material, is mounted on a steel support base 10. In the present embodiment the tool is made from CIBATOOL (RTM) BM5460 polyurethane block available from Vantico Limited (UK), although other suitable materials such as epoxy materials could be used. The tool 9 is of a shape suitable to receive a spar 3 (not shown in Figure 4). Thus the tool 9 has a base 11 and side portions 12 extending upwardly from the base such that the web 7 of the spar sits on the base 11. The flanges 8 of the spar extend upwardly and in the same general direction

as the inner surfaces of the side portions 12, a small gap being defined between them and the spar, in which gap the shim 6 is to be formed. The base 11 has a rebate 13 formed therein in which foam sealant tape is accommodated. The tool 9 also includes two  
5 locating pins 14, one provided at each end on the base 11 of the tool 9.

Figure 5 shows a spar 3 positioned on the tool 9. The spar 3 has two holes in which the locating pins 14 are accommodated, so that the spar 3 is correctly positioned on the tool 9. The  
10 spar 3 has further holes (not shown in Figure 5) in the web 7 of the spar 3 that provide fluid communication between the underneath of the spar in the region defined by the sealant tape in the rebate 13 and the uppermost side of the spar 3. Bag tape 15 (such as GS-100 bag tape, available from Airtech  
15 International, Inc) is provided around and encompasses those holes. The spar 3 has further pilot holes 16 machined along its length in each flange 8 of the spar 3, only two pilot holes being shown in Figure 5. When a wing is assembled, ribs are attached to the spar 3 via the pilot holes 16 by means of rivets, bolts or  
20 the like.

Figure 6 shows a cross section of the spar 3 and tool 9 shown in Figure 5 and additionally shows various other features/components omitted (for the sake of clarity) from Figure 5. Figure 6 shows the holes 18 provided in the web 7 of the spar  
25 3 that are encompassed by the bag tape 15. Over the holes 18 there is placed a breather mat 17 (such as an Airweave N-10 breather from Airtech International Inc). Figure 6 additionally shows brakes 19 placed along the length of the spar and over the pilot holes 16, the brakes 19 being in the form of a strip of  
30 carbon fibre (dry fibre). Resin inlets, in the form of coil springs 20 which act as pipes, are provided on the top of each of the flanges 8 of the spar 3. The coils of the springs are spaced

apart so that in use resin may flow out of the spring through the gaps between adjacent coils. (The resin inlets could of course equally be referred to as resin outlets, since resin is in use caused to flow out of the coils of the spring.) Bag tape 21 passes along the length of the top of the interior surface of the side portion 12 of the tool 9. Bag tape 22 also passes along the top of the interior surface of the flange 8 of the spar 3.

A shim 6 is formed in the gap between the side portions 12 of the tool and the flanges 8 of the spar 3 by means of a process that will now be described with reference to Figures 5, 6 and 7 of the drawings.

Figure 7 shows schematically the function of a vacuum bag 30 and the direction of the flow of fluids in the system. As a first step, surfaces of the spar 3 are suitably prepared and the various holes are machined in the spar, for example, by drilling. The spar is then placed on the tool such that the locating pins 14 are received in the appropriate holes in the web 7 of the spar 3. The bag tape 15 is then applied around the holes 18 in the web of the spar 3. A breather mat 17 is then placed over the holes 18. The vacuum bag 30, attached to a vacuum pump (not shown), is attached to the bag tape 15, the relevant sealed section of the bag being represented in Figure 7 by the reference numeral 23. The pump is operated to draw air from the bag and spar arrangement thereby drawing the web 7 of the spar 3 on to the tool 9 by virtue of the negative pressure caused between the spar 3 and the tool 9 in the region sealed by the seal in the rebate 13. The breather mat 17 prevents the vacuum bag from sealing over the holes 18, which would prevent air from being drawn from the sealed region beneath the spar web 7.

A pressure drop test is then performed to test the integrity of the seal between the spar and tool. If the vacuum pressure drop test is successful then brakes 19 are installed over holes



16 and the bag 30 is attached to the bag tapes 21 and 22 on the flange 8 and the spar 3, respectively, these sections of the bag being represented in Figure 7 by the reference numerals 24 and 25.

5       The purpose of the section 25 of bag 30 over the resin inlets 20 is to prevent resin from "fast tracking" from the inlet 20 via an undesired route to the vacuum pump. The bag 30 is thus temporarily sealed on all sides to the tool 9 by means of the bag tape.

10       After the bag 30 has been attached to the flanges 8 of the spar 3, to form sections 24, 25, a further vacuum pressure drop test is performed. If that pressure drop test is successful, then the resin inlets are opened so that resin including a  
15       inlet pipes 20, into the gap between the side portions 12 of the tool 9 and the flanges 7 of the spar 3.

      Suction is then applied to the bag 30 such that the bag 30 is drawn flat against the surface of the spar 3. For example, sections 25 of the bag 30 seal over spring 20, which has the  
20       effect both of converting spring 30 into an arrangement similar to a pipe with an open side and of preventing resin from flowing over the spar 3 as opposed to flowing into the gap between the spar 3 and the tool 9.

      Resin is drawn from the inlets 20 into the gap between the  
25       flanges 8 of the spar 3 and the tool 9 and towards the outlet holes 16. The resin enters the inlet 20 at one end of the spar 3 and the suction provided by the vacuum pump is applied at the other end of the spar 3 in the region of the boundary between the flange 8 and web 7 of the spar. The resin is consequently drawn  
30       from one end of the spar to the diagonally opposite end. The flow of the resin is such that the resin generally flows down from the inlet pipe 20 to the nearest pilot hole 16 opposite and

below the resin in the pipe 20. The resin progresses gradually along the length of the spar filling successive pilot holes 16, thereby gradually filling the gap. Resin is prevented from exiting the outlet holes 16 by means of the brakes 19. The vacuum pump that causes the resin to be drawn into the gap between the spar 3 and the tool 9 is operated until resin is witnessed in the brake 19 above each of the outlet holes 16. After the gap has been completely filled with resin, the vacuum pump is operated to increase the pressure from close to zero bar to about 0.2 bar, which allows the spar flanges 8 to relax gradually. The vacuum pump is, after a suitable length of time, switched off completely. The resin is then allowed to cure at room temperature for 24 hours. The cured resin thus forms a shim.

The resin used in the above described embodiment is a low viscosity resin that cures at room temperature and is able to flow freely under a relatively low pressure gradient (pressure differences of 1 bar at the very maximum) such as LY5052/HY5052 (an epoxy resin and hardener available from Vantico Limited).

After the resin has cured, the vacuum bag 30 is removed and the spar 3 and shim 6 are removed from the tool 9. The spar 3 and shim 6 may then be used in standard assembly techniques to form part of a wing skin, a wing skin being attached to the flange 8 of the spar 3 via the shim 6 with standard joining techniques.

It will be appreciated that various modifications may be made to the above described embodiment without departing from the spirit of the invention. For example, other resins can be used to create the shim. For example, a resin such as LY564/HY2954 (from Vantico Limited) could be used.

If a large gap is to be filled by the shim it may be beneficial to provide a fibre material mat or other solid shim in

the gap before filling with resin.

Whilst one bag is used to apply the vacuum to the system, several separate bags could be supplied. For example, one bag might be used to effect the fixing of the spar to the tool and  
5 further bags could be used to effect the flow of the resin into the gap between the spar flange and tool.

As opposed to using a coiled spring 20 as the resin inlet, a standard pipe with perforations or holes formed along its length could be used.

10 Further means can be implemented to improve flow of the resin into the gap between the spar flange and tool. For example, flow channels may be provided to guide the flow of resin from the inlet pipe into the gap. Such channels may be provided by an element running parallel to and along the length of the  
15 inlet pipe and could for example be in the form of a flat toothed belt, the gaps between the teeth of the belt forming the resin flow channels. Also the resin could be supplied under pressure.

A tool may of course be made to suit any size or shape of spar or other aircraft component. Tools of different shapes may  
20 be made to form shims for aircraft components other than wing spars. The tool could of course be made of any suitable material able to be machined to provide a surface of a pre-determined shape to within a relatively small tolerance (such as less than 0.2mm).

Claims

1. A method of enabling two aircraft components to be joined together, the method including the steps of
  - 5 providing a first aircraft component having a surface to be joined to a corresponding surface of a second aircraft component, the first and second components being so shaped that if joined there would be a gap defined between said surfaces of the first and second components,
  - 10 providing a resin infusion system comprising a source of resin,  
effecting flow of the resin from the source of resin into the gap by means of suction, thereby substantially filling the gap with resin, and
  - 15 curing the resin.
2. A method according to claim 1, wherein the flow of the resin out of the gap is restricted by means of a barrier.
3. A method according to claim 2, wherein at least a part of the barrier is formed by a surface of the resin infusion system.
- 20 4. A method according to claim 2 or claim 3, wherein the barrier is, during the filling of the gap with resin, removably fixed in position relative to the first aircraft component.
5. A method according to claim 4, wherein the barrier is fixed to the first aircraft component by means of a pressure  
25 difference.
6. A method according to claim 5, wherein a vacuum pump is used to cause the pressure difference.
7. A method according to any preceding claim, wherein a vacuum pump is used to provide the suction that draws the resin into the  
30 gap.
8. A method according to claim 7, when dependent on claim 6, wherein a single vacuum pump is used both to cause the pressure

difference that removably fixes the barrier to the first aircraft component and to provide the suction that draws the resin into the gap.

5 9. A method according to any preceding claim, wherein a filter is provided to hinder flow of the resin out of the gap.

10. A method according to any preceding claim, wherein the resin infusion system includes a plurality of resin ports, through which resin passes into the gap.

10 11. A method according to any preceding claim, wherein the resin infusion system includes a plurality of suction ports to which the suction is applied.

12. A method according to any preceding claim, wherein the first aircraft component includes at least one aperture arranged so that the suction is provided via said at least one aperture.

15 13. A method according to any preceding claim, wherein the curing of the resin is effected by cold curing.

14. A method according to any preceding claim, wherein the first aircraft component is formed of a composite material

20 15. A method according to any preceding claim, wherein the method includes a step of joining the second aircraft component to the first aircraft component.

16. A method according to any preceding claim, wherein the cured resin forms a shim.

25 17. Shim forming apparatus including a moulding tool having a surface shaped to receive a first aircraft component such that a gap is present between the surface of the moulding tool and the first aircraft component, the surface of the moulding tool being shaped to correspond to the surface of a second aircraft component, the apparatus further including a resin infusion  
30 system including a suction pump and a source of resin, the apparatus being so arranged that in use the gap between the surface of the moulding tool and the first aircraft component may

be filled with resin to form a shim.

18. Shim forming apparatus according to claim 17, wherein the moulding tool has a portion that in use is able to sealingly engage with a portion of the first aircraft component, to define  
5 a sealed region, which is connectable to a suction pump so that in use suction may be applied to the region, thereby holding the first aircraft component in a fixed position relative to the moulding tool.

19. Shim forming apparatus according to claim 17 or claim 18,  
10 wherein the apparatus further includes a vacuum bag that is attachable to the moulding tool and which, in use, enables suction to be applied to the moulding tool to draw resin from the resin source into the gap.

20. A moulding tool suitable for use in a shim forming  
15 apparatus, the moulding tool having a surface shaped to receive a first aircraft component such that a gap is present between the surface of the moulding tool and the first aircraft component, the surface of the moulding tool being shaped to correspond to the surface of a second aircraft component, the moulding tool  
20 being so configured that it may be arranged so that a gap formed between the surface of the moulding tool and such a first aircraft component may be filled with resin to form a shim.

21. An aircraft component and shim formed thereon, the shim having been formed by performance of the method of claim 16, by  
25 the use of the apparatus of claim 17 or claim 18, or by the use of the moulding tool of claim 20.

22. An aircraft structure including a first aircraft component connected to a second aircraft component, there being a shim interposed between the first and second components, the shim  
30 having been formed by performance of the method of claim 16, by the use of the apparatus of claim 17 or claim 18, or by the use of the moulding tool of claim 20.

23. An aircraft including an aircraft structure according to claim 22.

24. A method of forming a shim on an aircraft component substantially as herein described with reference to the

5 accompanying drawings.

25. An aircraft component and shim formed thereon substantially as herein described with reference to the accompanying drawings.

26. A moulding tool for forming a shim substantially as herein described with reference to the accompanying drawings.

Abstract

Method and apparatus for joining aircraft components

5 The surface of a moulding tool (9), for receiving a first  
aircraft component, for example a spar (3), is shaped to  
correspond to the surface of a second aircraft component,  
for example a wing skin (5). A gap is defined between the  
10 tool (9) and the first component. Resin is drawn into the  
gap by a suction pump. The resin fills the gap and cures to  
form a shim (6). The first and second components, which are  
in the form of composite material structures, are then  
joined together without any significant voids being formed  
15 therebetween.

20

Fig. 3 to accompany the abstract on publication



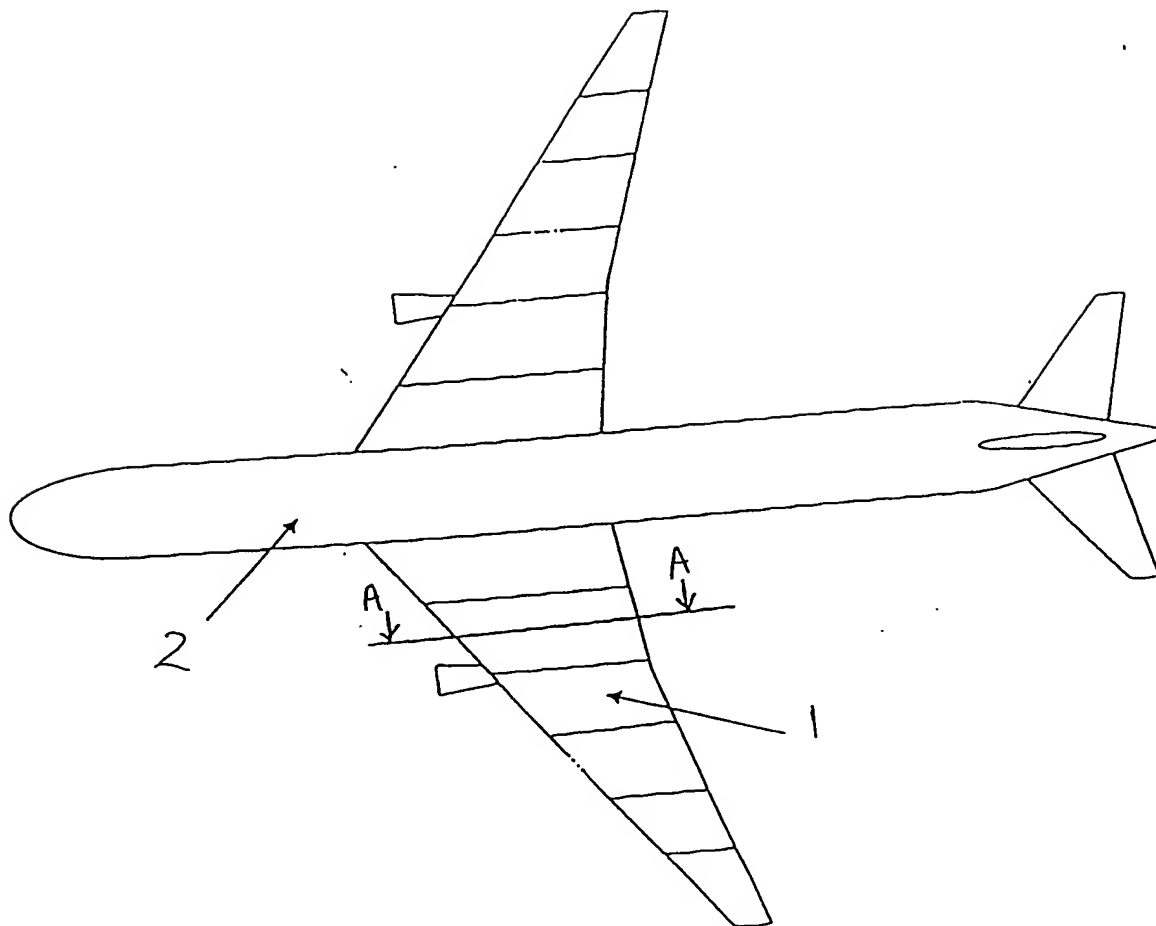


Figure 1

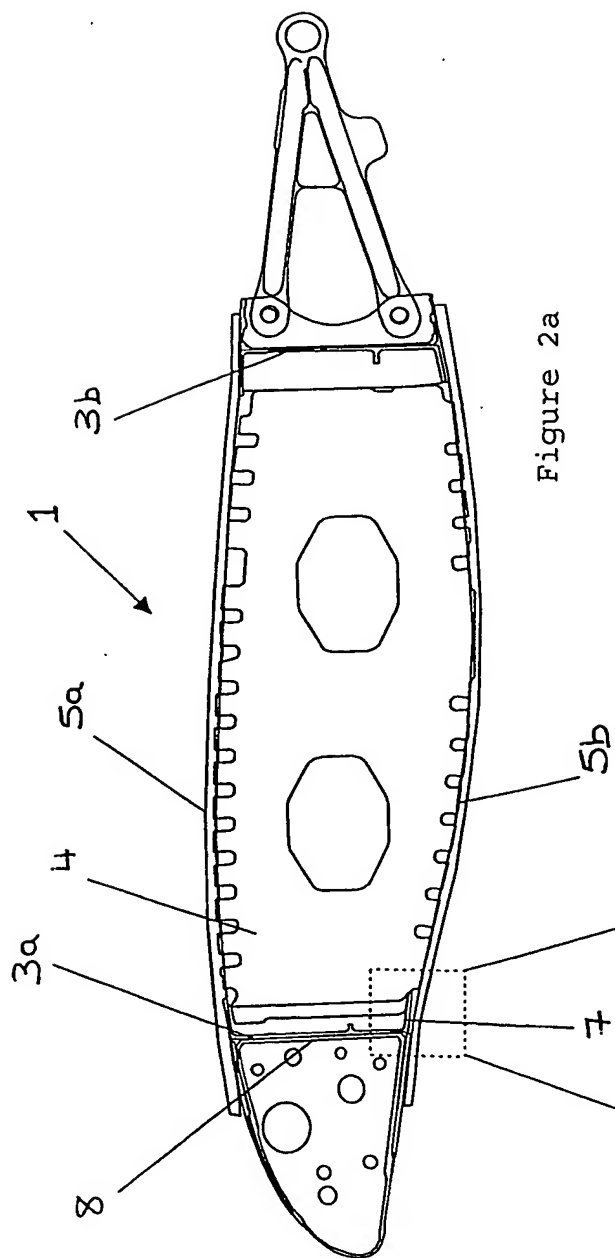


Figure 2a

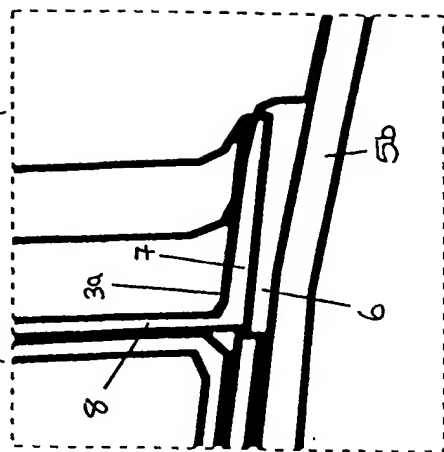


Figure 2b

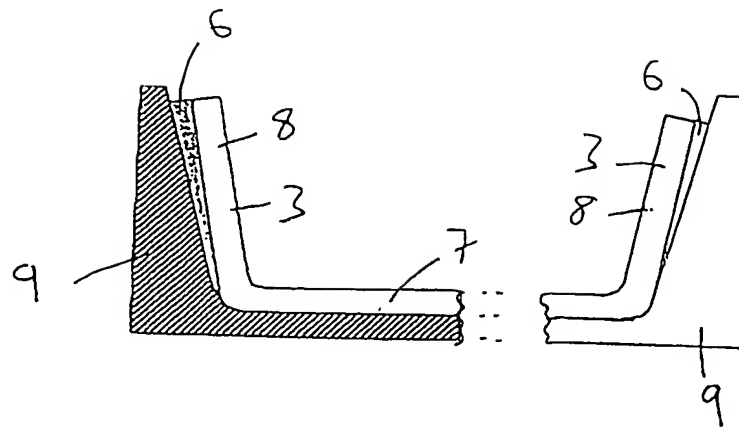


Figure 3

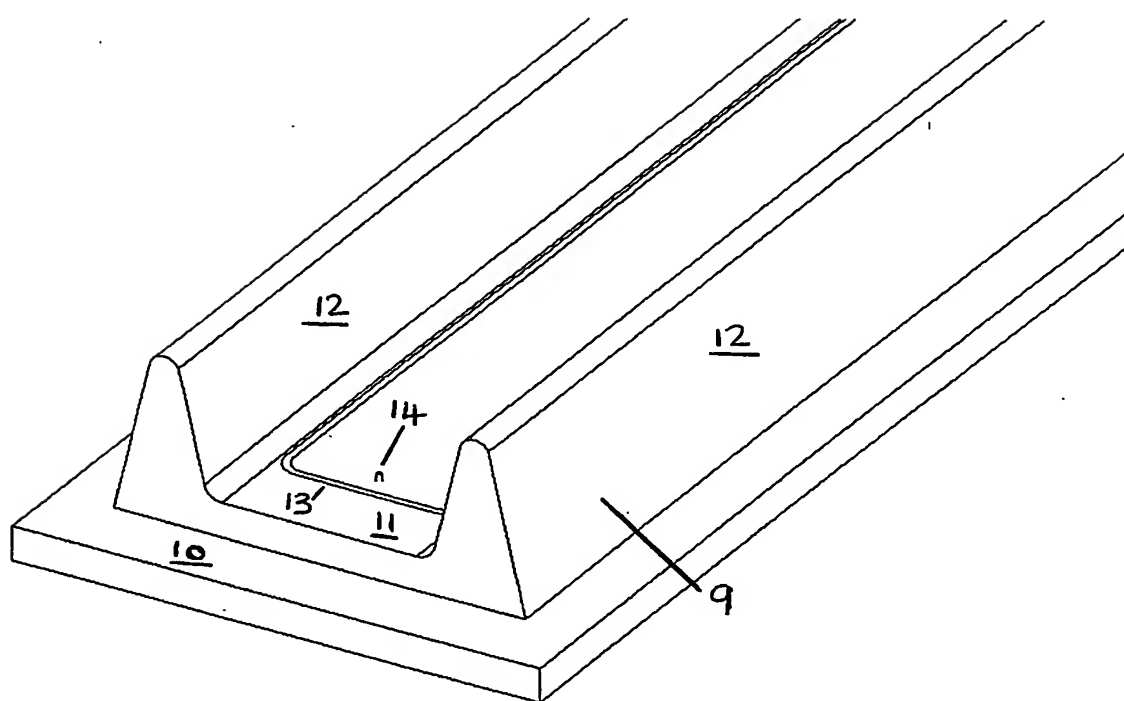


Figure 4

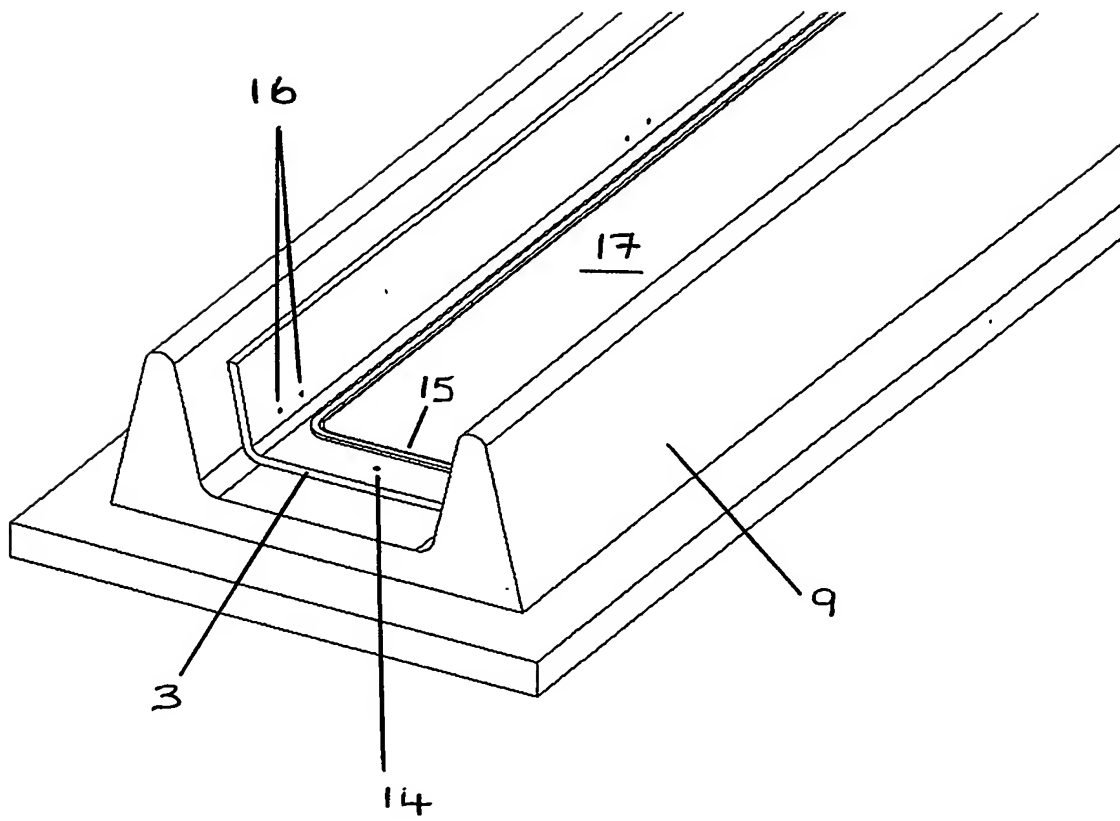


Figure 5

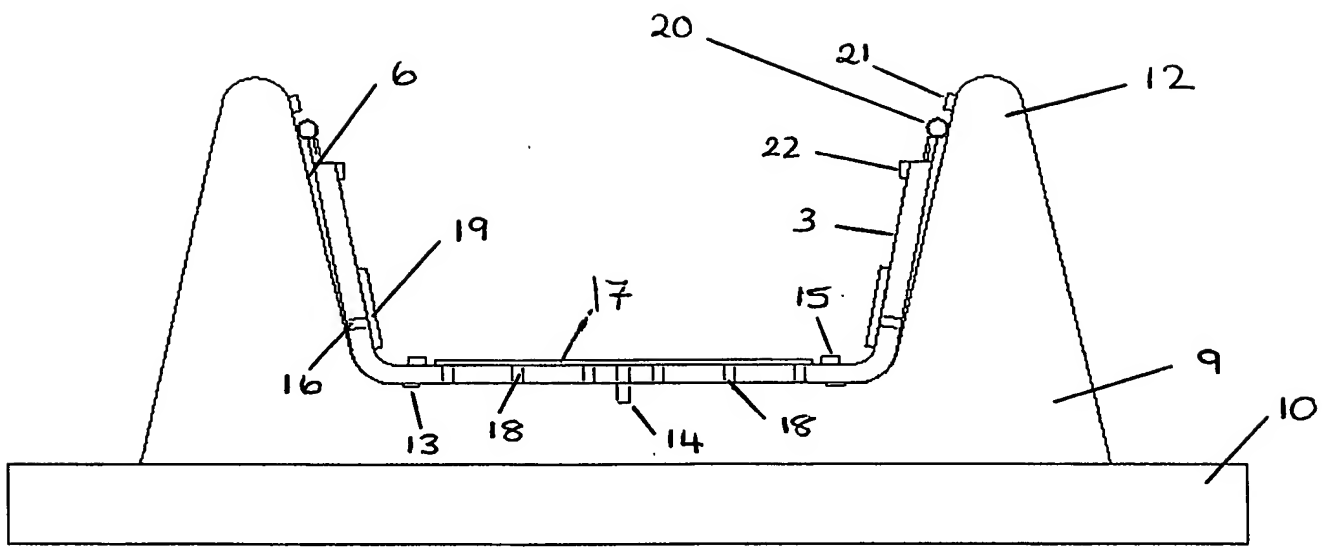


Figure 6

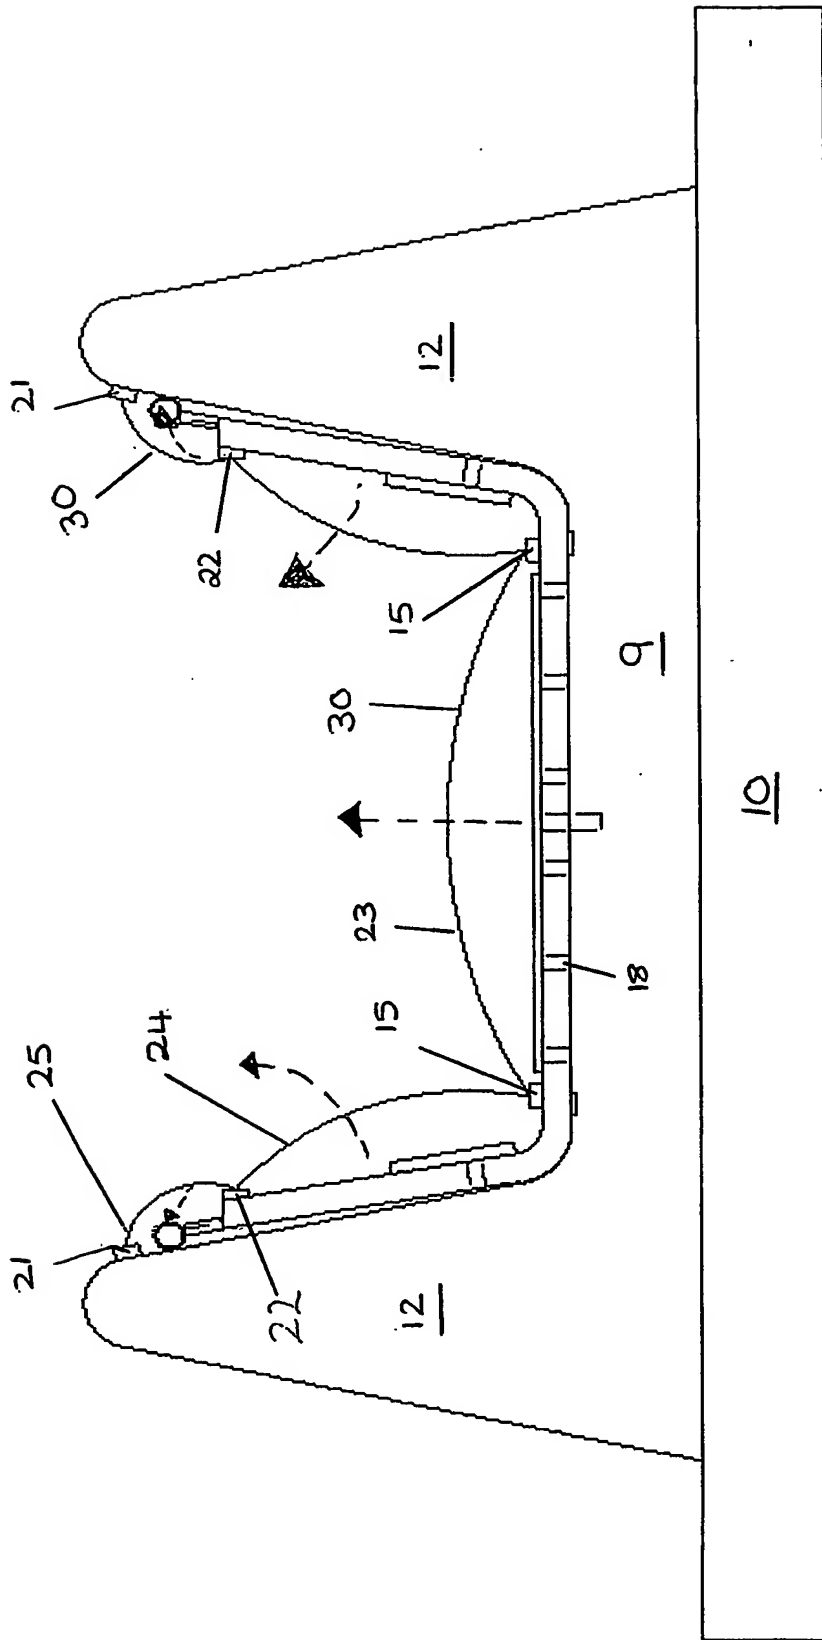


Figure 7

THE PATENT OFFICE  
23 OCT 2003  
Received in Patents  
International Unit

PCT Application

**GB0304183**





**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**